Frequency Inverters
SJ Series Type P1

HITACHI
Inspire the Next

Automation Solutions by Hitachi

SJ Series, Type P1 – High Performance Inverter

Hitachi maintains research and development departments throughout the business. These are continually working on the further improvement of products and technologies and synergy effects are specifically used in product policy. As a result, many components for Hitachi products are manufactured within the company itself.

Hitachi offers a broad range of high performance inverters for many industrial applications. The inverters' modular design and high versatility ensure optimal, cost-efficient technical solutions which can be individually adapted to the respective application. The industrial inverters can be configured easily, and are designed to deliver unprecedented performance, reliability and flexibility.

The new SJ Series, Type P1 is at the cutting edge of technology for premium inverters. Highly flexible, it is suitable for a wide variety of demanding applications. SJ-P1 has premium drive characteristics to achieve instantaneous force and efficient operation.

Ease of Use — Page 04

Flexible & User-friendly — Page 06

Safety & Safe Operation — Page 08

SJ-P1 Smooth Operation and Precision — Page 10

Various Functions — Page 12

Eco-friendly — Page 13

Specifications — Page 14

Ease of Use

ProDriveNext Software

Easy to use programming software allows user-friendly and intuitive operation.

- Online monitoring of all parameters and I/O terminal status
- Parameter conversion between different series
- Faster parameter download/upload with USB communication
- Windows XP, 7, 8, 10 compatible

Easy operation

- LED control
- RS422 port
- Micro USB port

VOP colour LCD operator

- 12 languages available
- Colour TFT display
- Real time clock built-in
- Parameter and EzSQ programming data copy function

Password function

Helps to ensure that parameters remain secured and safeguarded.

User-friendly display

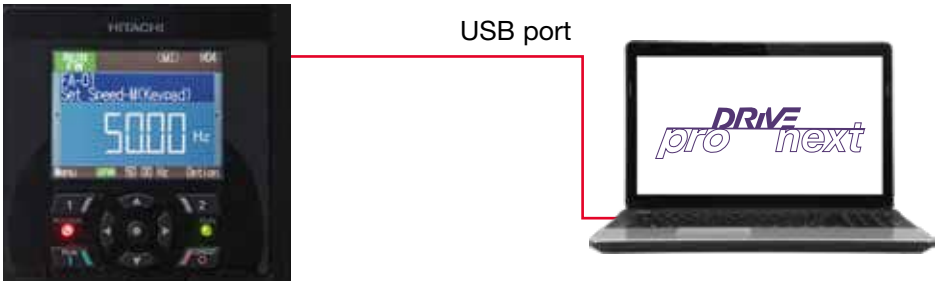

Network compatibility & external ports

The SJ-P1 Series is particularly suitable for easy integration into various networks using optional fieldbus modules.

- RS485-Modbus (Built-in)
- RS422 port (Built-in)
- Ethernet
- EtherCAT
- ProfiNET
- Profibus-DP

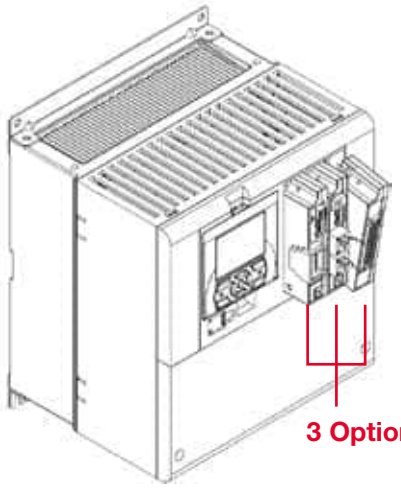

Option slots

Hitachi original cassette option for flexible use.

- Up to 3 options can be used simultaneously
- Easy access from the inverter front
- Various fieldbus and I/O options available

Option modules

- Ethernet
- EtherCAT
- Profibus-DP
- ProfiNET
- Feedback
- Safety
- Analog input and output
- Relay output

EzCOM Inverter-to-Inverter communication

SJ-P1 also gives the option to communicate by using Inverter-to-Inverter connections without a PLC or PC.

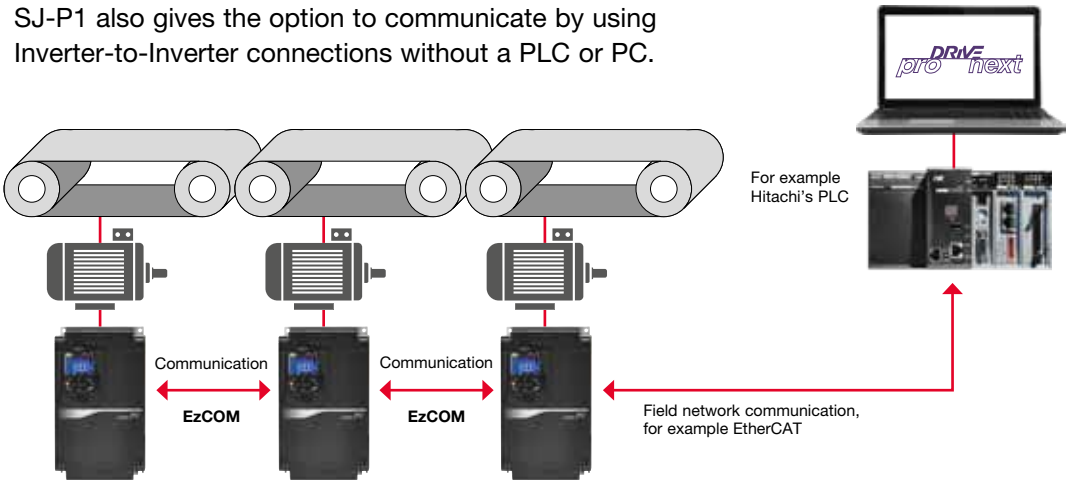

Flexible & User-friendly

Easy wiring

Screwless terminal block (control terminal block).

Modbus communication as standard – two communication terminals are provided. Therefore daisy chain wiring is easy to realize.

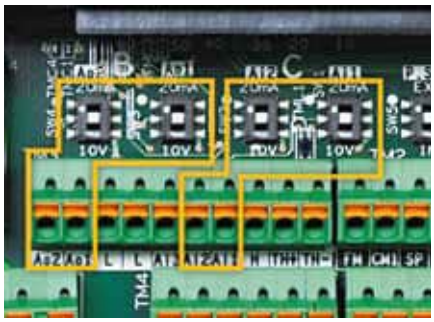

0–10 V in/out and 4~20 mA in/out are easily switched by DIP switch.

- 2 analog inputs (3 inputs in total)
- 2 analog outputs

Heat sink extraction

It is easy to place the cooling fans to the outside of the cabinet since the L-shaped brackets are separate parts.

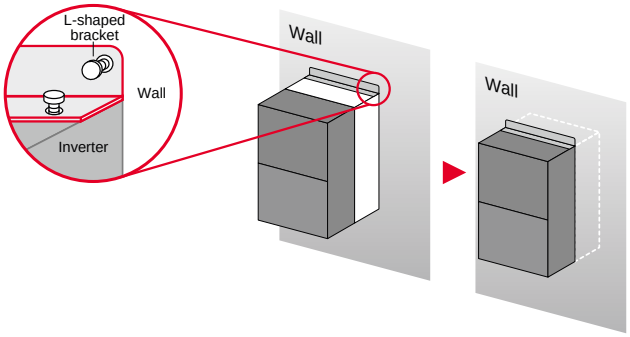

Fulfilling lifetime prediction functions

- Electrolytic capacitor of power circuit
- Cooling fan

Improved efficiency with 24 VDC supply

In addition to normal power supply (R0, T0), external 24 VDC control power can also be applied as standard. Parameter setting is also available if the main power is turned off meaning operational efficiency is increased and standby power is reduced. It will also contribute to energy savings. Connecting to the PLC and settings via PC configuration software are also available.

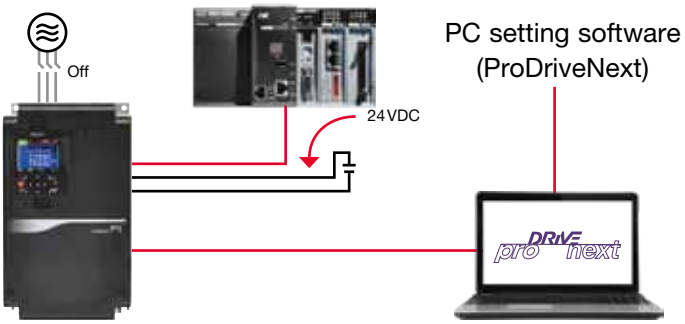

Quick diagnose of failure occurrence

P1 can also store internal data to the internal memory on a continuous basis. It can also upload data to the PC when an error occurs – making rapid diagnosis possible.

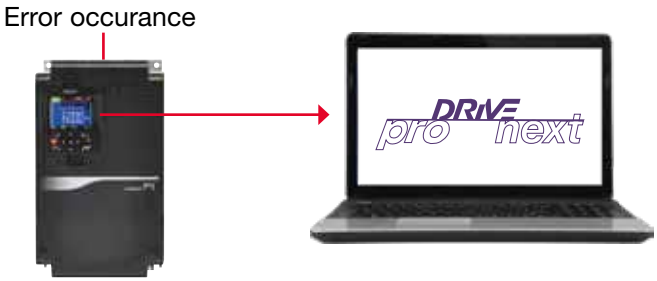

Easy to customize with configuration software

- **PC software**
  The configuration software 'ProDriveNext' easily enables the user to set up, monitor and diagnose the device.
- **Customization of functions can be easily achieved**
  The existing functions can be modified by using a 'BASIC'-like programming language.

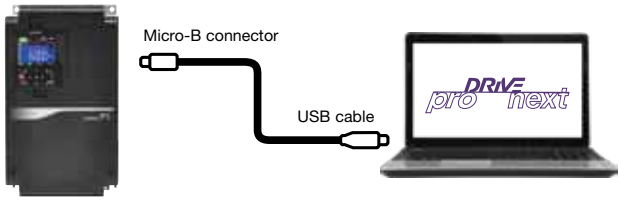

Safety & Safe Operation

Certified “functional safety” international standard

- Certified functional safety
- Third party certified electrical safety
- Also in compliance EN61508, IEC/EN/UL61800-5-2 SIL3
- STO as functional safety standard
- IEC/EN60204-1 Stop Cat. 0
- EN/ISO13849-1 Cat. 3, PLe
- IEC61508, IEC/EN/UL61800-5-2, IEC/EN62061 SIL3 STO
- SS1, SLS and others are available with slot-in option card

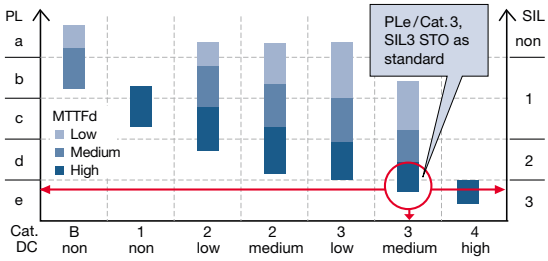

Standard (without option card)



Optional (needs slot-in card)











Trip avoidance functions

Minimum time deceleration function, over-current suppression and DC bus AVR functions are included as standard.

These functions increase the robustness of the product and help to avoid unnecessary tripping. Improved torque limiting/current limiting functionality enables load restrictions to be applied in order to protect machinery and equipment.

Minimum time Deceleration Function

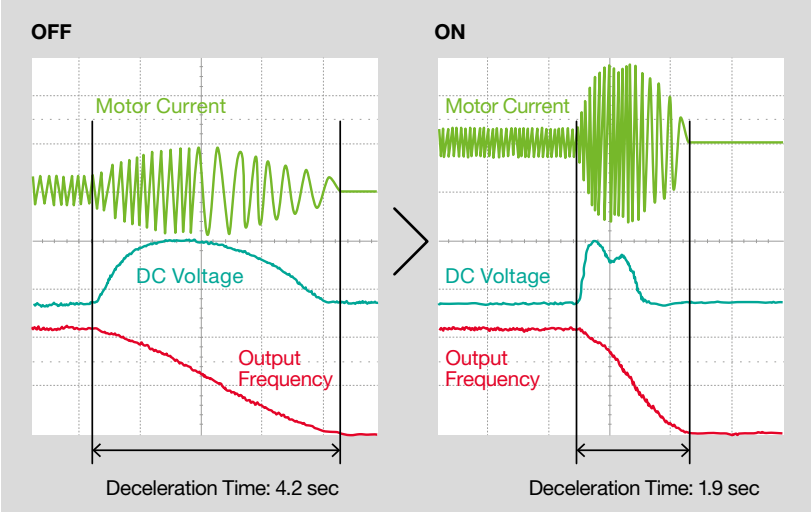

Over-current Suppression Function*

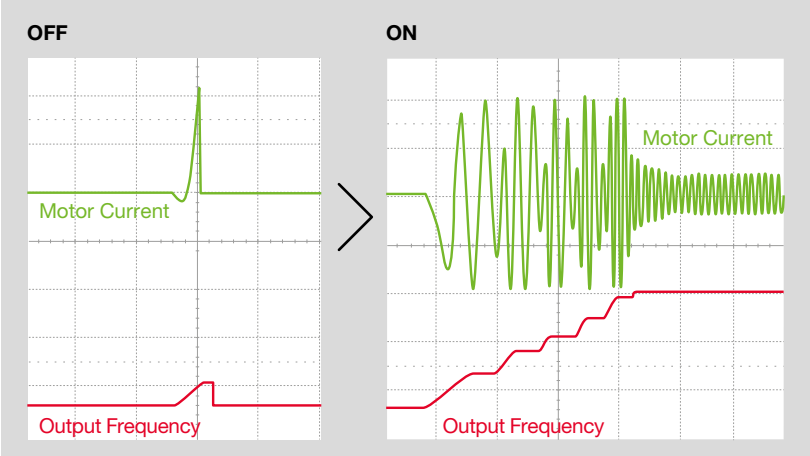

*Turn off this function for lifting equipment.

SJ-P1 Smooth Operation and Precision

"Smooth operation" can be easily achieved

High starting torque from the low speed area supports the smooth drive of heavy load.



(*Sensorless vector control with ND rating)

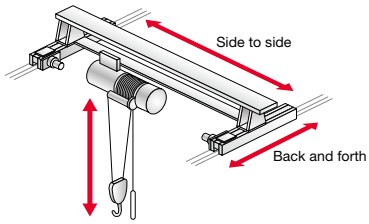

Decreasing overshoot and undershoot contributes to smooth and stabilized operation with less shock.

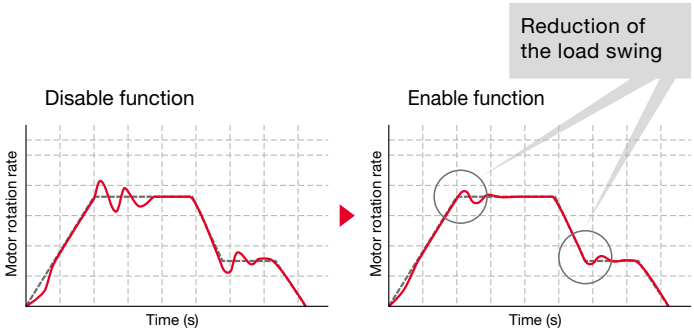

Steady operation for crane, lift, transport etc.

Trip can be prevented by smooth driving to support steady operation of crane and conveyer for better productivity.

"High speed rotation" for precision

590 Hz operation is available for precise metal processing. PM motor is also available up to 400 Hz.

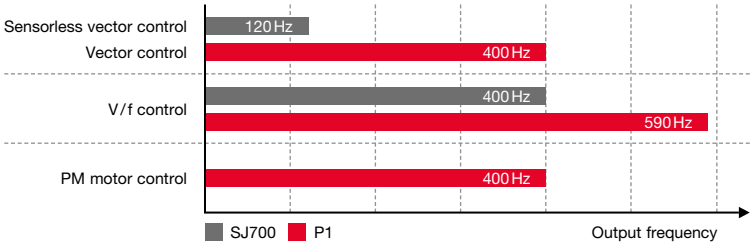

Induction motor & permanent magnet motor can be controlled with one inverter series

The SJ-P1 inverter can be used to drive both induction motors (IM) and permanent magnetic motors (PM). PM motors are energy efficient and make effective use of available space. Thanks to the over-current trip level setting, demagnetization of PM motors can be suppressed.

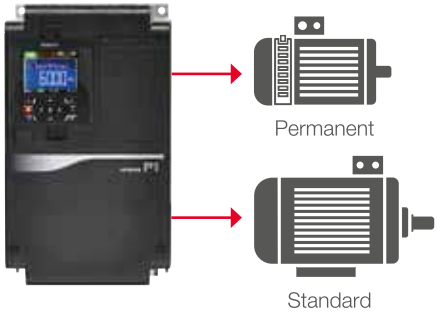

Multi-rating to support space and cost savings

Triple-rating for IM motor for various applications is available.
Also dual-rate for PM motor control can be selected.
Multi-rating helps to save space and costs.

Rating	VLD (Very Light Load)	LD (Light Load)	ND (Normal Load)
Induction motor			
PM motor			
Applications	Fan-pump		
		Metal tooling-conveyer	
			Crane-mixer
Overload current rating	110 % 60 sec, 120 % 3 sec	120 % 60 sec, 150 % 3 sec	150 % 60 sec, 200 % 3 sec
Example 400 V / 18.5 kW Max rated output current	47.0 A	43.0 A	39.0 A

Various Functions

Intuitive and easy-to-use TFT LCD operator

Quick View:
Get an overview

Multi-monitor (3 lines)

Verify View:
Monitor all settings

Reference screen

Clear View:
Easy to see

Large monitor screen

Error View:
Quick trouble shoot

Trip history screen

Built-in BRD circuit

Built-in braking resistor control circuit is available as standard in all models up to 37 KW (resistor optional).

EzCOM (peer-to-peer communication)

SJ-P1 supports peer-to-peer communication between multiple inverters using the built-in RS485 port. In this configuration one administrator inverter is required in the network whilst the other inverters act as master or slave.

Eco-friendly

RoHS compliant
The SJ Series, Type P1 meets EU RoHS requirements.

Endurance in severe conditions
Vanish coating of the internal PC board ensures an improved endurance to certain severe conditions (logic PCB and I/F PCB are excluded).

Long life components
The cooling fans and built-in capacitors have an estimated design lifetime of 10 years*. By using the ON/OFF control function the lifetime can be extended.

*10 years is a design lifetime based on calculation, not guaranteed

General specifications

Item			General specifications
PWM system			Sine-wave PWM system
Output frequency range			0.00 to 590.00 Hz
Frequency accuracy			For the highest frequency, Digital: ±0.01 %, Analogue: ±0.2 % (25 ±10 °C)
Frequency resolution			Digital: 0.01 Hz, Analogue: Max. frequency / 4000 (Ai1 terminal / Ai2 terminal: 12bit / 0 to +10 V or 0 to +20 mA, Ai3 terminal 12bit / –10 to +10 V)
Volt. / Freq. characteristic	**IM**		V / F control (constant torque / reduced torque / free), Automatic boost control, V / F control with encoder (constant torque / reduced torque / free), Automatic boost control with encoder, Cascade type sensorless vector control, 0 Hz sensorless vector control
	SM / PMM		Method of synchronous startup for smart sensorless vector control
Acceleration / Deceleration time			0.00 to 3600.00 seconds (Linear, S-curve, U-curve, Inverted-U-curve, EL-S-curve)
DC braking			Variable operating frequency, delay time, braking force, time
Input signal	**Digital**		11 terminals, NO / NC switchable, Sink / Source changeable by switch (A or B terminal accept a pulse train)
	Analog		4 terminals Ai1 / Ai2 terminal (0 to 10 VDC or 0 to 20 mA, Input impedance: 10 kΩ), Ai3 terminal (–10 to +10 VDC, Input impedance: 10 kΩ) Thermistor input terminal (PTC / NTC resistor allowed)
	Pulse train (These can be used as digital input terminal too)		2 terminals (Maximum 27 VDC, 5.6 mA, 32 kHz)
Output signal	**Digital**		5 transistor output terminals
	Analog		2 terminals (0 to 10 VDC or 0 to 20 mA)
	Pulse train		1 terminal (0 to 10 VDC, Maximum 1.2 mA, 3.60 kHz)
	Relay		1 1a contact relay, 1 1c contact relay
Network	**Standard**		RS485 (Modbus RTU), USB micro B port, RJ45 port
	Option		Ethernet, EtherCAT, Profibus-DP, ProfiNET
Other functions			V / F free setting (7 points), Upper and lower frequency limit, Frequency jump, Curve acceleration and deceleration, Manual torque boost, Energy-saving operation, Analogue output adjustment, Mimimum speed, Carrier frequency adjustment, Motor electronic thermal function (free is possible), Inverter thermal function, External start-end (speed and rate), Frequency input selection, Trip retry, Restart stop, Various signal output, Initialization setting, PID control, Auto-decel at shut-off, Brake control function, Commercial switching function, Auto-tuning (on / offline), etc.
Functional safety			STO: SIL3, Cat. 3 / PLe
Protection functions			Overcurrent error, Overload error, Brake resistor overload, Over voltage error, Memory error, Undervoltage error, Current detector error, CPU error, External trip error, USP error, Ground error, Supply overvoltage error, Phase output error, Thermistor error, Brake error, Low-speed range overload error, Inverter overload, RS485 communication error, RTC error, etc.
Operating environment	**Ambient temperature**	**VLD**	–10 to 40 °C
		LD	–10 to 45 °C
		ND	–10 to 50 °C
	Storage temperature		–20 to 65 °C
	Humidity		20 to 90 % RH (No condensation allowed)
	Vibration	**P1-00041-H (P1-004H) to P1-00620-H (P1-220H)**	5.9 m/s² (0.6 G), 10 to 55 Hz
		P1-00770-H (P1-300H) to P1-03160-H (P1-1320H)	2.94 m/s² (0.3 G), 10 to 55 Hz
	Installation place		A maximum altitude of 1000 m, without gases or dust
Certification			UL, c-UL, CE marking, RCM (planned: KC, EAC, NK)
Options			Option cassette: Input / Output option (Analog input / output option, Relay output option), Communication (Ethernet, EtherCAT, Profibus-DP, ProfiNET), Feedback (Line drive output 00041, Push-pull output, Resolver output), Temperature detector (Optional temperature measuring sensor) Others: Braking resistor, AC / DC reactor, Noise filter, Operator cable, Harmonics suppresion unit, Noise filter, LCR filter, Analog panel, Regenerative braking unit, PC software "ProDriveNext", Relay expansion terminal board

Conformity to global standards

CE, UL, c-UL, c-Tick approvals.

Sink / source logic is standard

Logic input and output terminals can be configured for sink or source logic.

Wide input power voltage range

Input voltage range from 380 V to 500 V as standard.

Standard specifications

Model name P1-*****-H			00041	00054	00083	00126	00175	00250	00310	00400	00470
Enclosure			IP20 - UL Open Type								
Applicable motor capacity (4 poles) (kW)		VLD	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22
		LD	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22
		ND	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5
Rated capacity (kVA)	400 V	VLD	2.8	3.7	5.8	8.7	12.1	17.3	21.5	27.7	32.6
		LD	2.1	3.3	4.6	7.7	11.1	15.2	20.1	25.6	29.8
		ND	1.7	2.8	3.8	6.4	10.3	13.2	17.3	22.2	27.0
	500 V	VLD	3.6	4.7	7.2	10.9	15.2	21.7	26.8	34.6	40.7
		LD	2.7	4.2	5.8	9.6	13.9	19.1	25.1	32.0	37.2
		ND	2.2	3.5	4.8	8.0	12.8	16.5	21.7	27.7	33.8
Rated input AC voltage			Control power: Single-phase supply 380 to 500 V (+10 %, –15 %), 50 Hz / 60 Hz (±5 %)								
			Main power: 3-phase (3 wire) 380 to 500 V (+10 %, –15 %), 50 Hz / 60 Hz (±5 %)								
Rated output current (A)		VLD	4.1	5.4	8.3	12.6	17.5	25.0	31.0	40.0	47.0
		LD	3.1	4.8	6.7	11.1	16.0	22.0	29.0	37.0	43.0
		ND	2.5	4.0	5.5	9.2	14.8	19.0	25.0	32.0	39.0
Overload current rating		VLD	110 % 60 sec / 120 % 3 sec								
		LD	120 % 60 sec / 150 % 3 sec								
		ND	150 % 60 sec / 200 % 3 sec								
Rated output voltage			3-phase (3 wire): 380 to 500 V (proportional to input voltage)								
Starting torque (ND)			200 % / 0.3 Hz								
Regenerative braking			Internal BRD circuit (external discarge resistor)								
Minimum resistance value (Ω)			100	100	100	70	70	35	35	24	24
H (height) (mm)			255	255	255	255	260	260	260	390	390
W (width) (mm)			150	150	150	150	210	210	210	245	245
D (depth) (mm)			140	140	140	140	170	170	170	190	190
Weight (kg)			3	3	3	3	6	6	6	8,5	8,5

Model name P1-*****-H			00620	00770	00930	01160	01470	01760	02130	02520	03160
Enclosure			IP20 - UL Open Type								
Applicable motor capacity (4 poles) (kW)		VLD	30	37	45	55	75	90	110	132	160
		LD	30	37	45	55	75	90	110	132	160
		ND	22	30	37	45	55	75	90	110	132
Rated capacity (kVA)	400 V	VLD	43.0	53.3	64.4	80.4	101.8	121.9	147.6	174.6	218.9
		LD	39.5	48.5	58.9	72.7	93.5	110.9	135.1	159.3	200.9
		ND	33.3	42.3	52.0	63.0	77.6	103.9	124.7	150.3	180.1
	500 V	VLD	53.7	66.7	80.5	100.5	127.3	152.4	184.5	218.2	273.7
		LD	49.4	60.6	73.6	90.9	116.9	138.6	168.9	199.2	251.1
		ND	41.6	52.8	65.0	78.8	97.0	129.9	155.9	187.9	225.2
Rated input AC voltage			Control power: Single-phase supply 380 to 500 V (+10 %, –15 %), 50 Hz / 60 Hz (±5 %)								
			Main power: 3-phase (3 wire) 380 to 500 V (+10 %, –15 %), 50 Hz / 60 Hz (±5 %)								
Rated output current (A)		VLD	62.0	77.0	93.0	116	147	176	213	252	316
		LD	57.0	70.0	85.0	105	135	160	195	230	290
		ND	48.0	61.0	75.0	91.0	112	150	180	217	260
Overload current rating		VLD	110 % 60 sec / 120 % 3 sec								
		LD	120 % 60 sec / 150 % 3 sec								
		ND	150 % 60 sec / 200 % 3 sec								
Rated output voltage			3-phase (3 wire): 380 to 500 V (proportional to input voltage)								
Starting torque			200 % / 0.3 Hz					180 % / 0.3 Hz			
Regenerative braking			Internal BRD circuit			opt. internal		Ext. regen. braking unit			
Minimum resistance value (Ω)			20	15	15	10	10	–	–	–	–
H (height) (mm)			390	540	550	550	550	700	700	740	740
W (width) (mm)			245	300	390	390	390	390	390	480	480
D (depth) (mm)			190	195	250	250	250	270	270	270	270
Weight (kg)			8,5	22	31	31	31	41	41	53	53

HITACHI

Inspire the Next

Hitachi Europe GmbH, Niederkasseler Lohweg 191, D-40547 Düsseldorf
Phone: +49(0)211-5283-0
www.hitachi-industrial.eu, automation.industrial@hitachi-eu.com
Hitachi Industrial Equipment Systems Co., Ltd., Japan

All company and product names in this brochure are
the property of the respective companies.

DB-SJP1-102/19EN
www.moon-agentur.de